


Specifications

Bore	Φ40.0mm	Stroke	32.0mm	Disp.	40.2cc	Applications	4-stroke glow 200 class
Weight (Approx.)	Main body : 1,260g / Muffler : 90g / Ignition : 100g			RPM Range	Approx. 1,800-8,000rpm	Max on ground	Approx. 6,500-7,500rpm
Propeller	19"x10"~21"x8"	Plug	CM-6	Battery for ignition system	Voltage: 6-12V, greater than 1,000mA (2-3S Li-Po or 5S NiMH)		
Standard accessories	<ul style="list-style-type: none"> Engine mount set 1set Hexagonal wrench 1set Anti-loosening nut 1pc Ignition system(w/sensor) 1set 	<ul style="list-style-type: none"> Limit gauge (0.1t) for tappet adjustment 1pc Spanner for tappet adjusting lock nut 1pc Carburetor adjustment bar 1pc Spark plug[CM-6](Attached to the engine) 1pc 	<ul style="list-style-type: none"> Plug wrench 1pc Muffler set 1set Choke bar 1pc 				
Optional parts	<ul style="list-style-type: none"> Filter with weight [G36-154] Aluminum spinner nut [120S-30] 	<ul style="list-style-type: none"> Durable tube for Gasoline (1m) [G36-155] Tappet adjusting kit [120S-161] 	<ul style="list-style-type: none"> Mount spacer [G40-169] Digital tachometer [G17-167] 				

1. Fuel


- The fuel is mixture of regular gasoline and high-quality 2-stroke engine oil.
- [Example of oil recommendation]
 - Klotz KL-200 Original Techniplate
 - Deluxe Materials PowerModel 2T-S etc.
- Be sure to use the mixture "gasoline : oil = 15~20 : 1" by volume ratio. (Ex. 1000ml of gasoline should be mixed with more than 50ml of oil).
- During the break in process, use 15:1 mixed fuel to ensure the best lubrication for initial running.
- Any damage caused by the fuel used, in which the oil ratio is lower than 20:1 ratio, is not warranted.
- Do not use gasoline containing ethanol. It may cause not only power loss but also corrosion inside the engine.

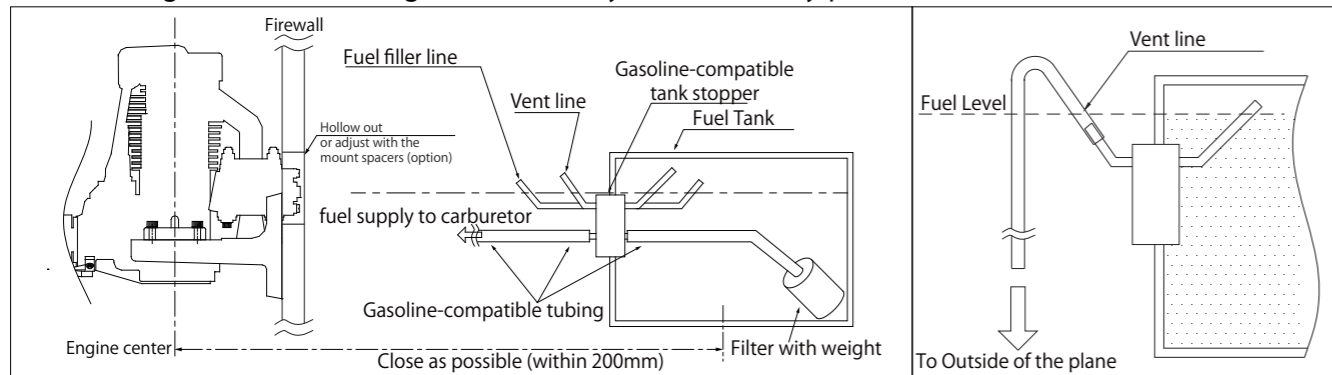

2. Ignition


- Ignition arrangement- Place the main unit as far from other electrical devices as possible.

- (1) Plug cord (meshed high tension cord)
Insert the plug cap of the plug cord deeply into the plug attached to the cylinder to make sure it will not come off.
- (2) Sensor cord
Connect with the cord from the sensor attached to the engine.
- (3) Battery cord (black / red cord)
Use a fully charged battery that has adequate spec. (6-12V, more than 1000mA is recommended). Between the battery and main unit, make sure to set a heavy duty switch whose capacity is higher than 3A.
- (4) Tachometer cord
Connect the digital tachometer (Option). Otherwise the connector is normally vacant.

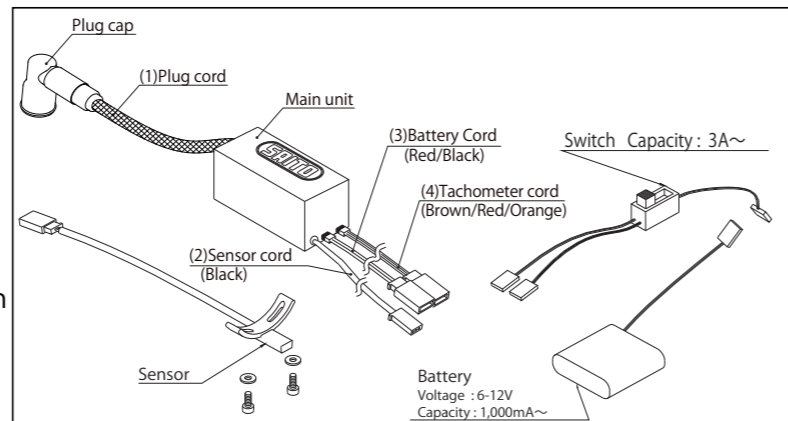


3. Method of choke (No need when you use starter)

- In advance, make a thin hole on the cowling to insert the choke bar / slow needle adjustment bar.
- During choking, be sure to turn off the switch of the ignition system.
- As shown in the fig, pass the choke bar (with M3.5 thread on its tip) through the hole on the cowling. Then turn the bar to insert into the M3.5 internal thread at the center of the throttle lever.
- Pull the choke bar and fix it with a clip or clamp with full throttle as shown in the fig so that it may not go back to the previous position.
- Grasp the prop by hand and turn it in the direction of normal operation (CCW) for several times, until the carburetor generates hissing-like sound. After hearing this sound for about 5 times, quickly flick the prop approximately 10 times.
- After that, remove the choke bar. After that, power on the ignition system and flick the prop quickly to start the engine. If the engine doesn't start, repeat the choking procedure.

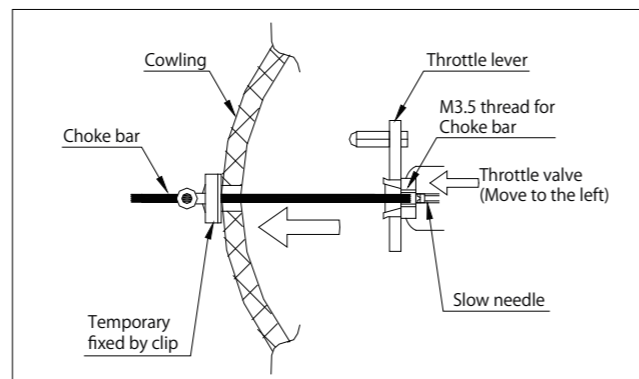4. Break-in **MOST IMPORTANT!!**

- Prop-recommendation : a well balanced Mejzlik 20"x 8" carbon-made prop for break in.
- Use 15:1 fuel:oil ratio for break in.
- **Never make the fuel mixture lean during break in. It could cause seizure even during idling or running at low-speed.**
- Before starting the engine, open the main needle **Approx. 3 turns** and the slow needle **Approx. 5 turns CCW** each from full close.
- Start the engine (using a starter is recommended for safety).
- Run for about 5 seconds at low speed to warm up.
- Open throttle gradually up to full open, in the meantime turn the main needle CCW. Continue to turn the main needle CCW until the RPM declines (to approx 4,000rpm), keeping the throttle fully opened.
- If RPM doesn't drop, turn the slow needle CCW to make mixture much richer.
- Run in this very rich condition for 2 tanks.

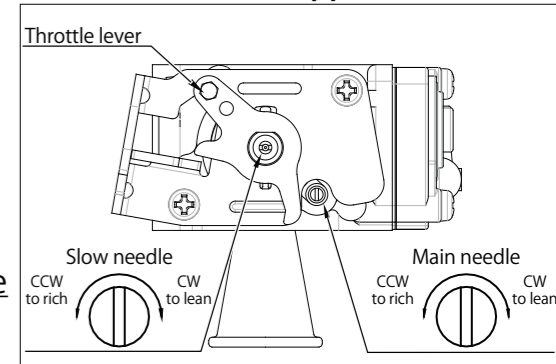


5. Needle reference position (Set After Break-in)

- Main needle : Approx. 2~2.5 turns from fully close
- Slow needle : Approx. 4.5~5 turns from fully close (Then throttle should be fully closed)
- Actually the best condition of the needle varies depending on the prop, temperature, humidity and so on. Please adjust based on the engine performance during flight.

6. Tappet adjustment

The valve clearance should be checked and adjusted after Break-in and every after 2 hours while the engine is cold. Before adjusting tappet gaps, tighten the screws around cylinders etc.


1. Remove the spark plug and rocker arm covers from the cylinder. Then turn the prop CCW by hand to place the piston at TDC of compression stroke.
2. Loosen the lock nut and adjust the gap by hexagonal wrench until you get the correct gap (below pic) for both of intake & exhaust.
3. Once the gap is set, tighten the lock nut and attach the plug and covers.
4. Turn the prop by hand to check if the compression is enough. If the gap is less than 0, the valve is always opened slightly and lose compression. Then adjust again.

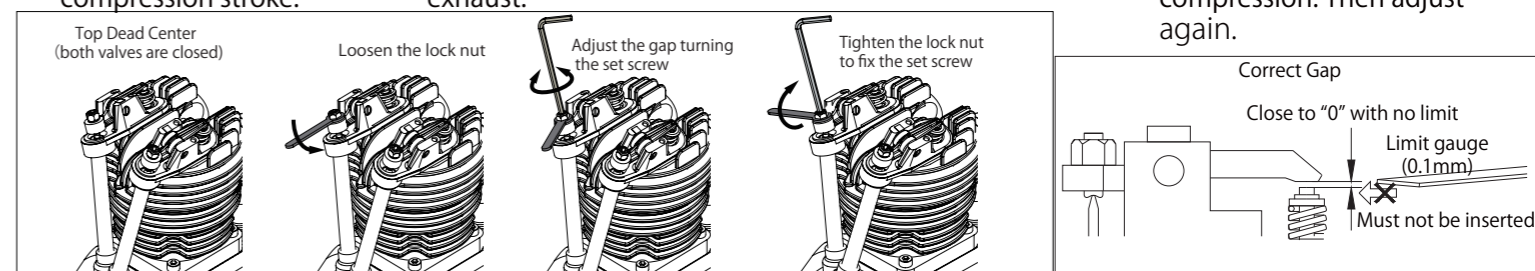


Note:

- As the fuel contains oil, the exhaust will produce some residue on the airplane.
 - Use reliable and well balanced prop, otherwise it can cause abnormal vibration and may result in serious accident.
 - During operation, the screws all over the engine can be loosen by heat expansion of metal. Tighten them up occasionally.
 - When the exhaust valve gets dull by carbon or sludge especially in cold atmosphere, remove the rocker cover and apply some anti-rust spray to the exhaust valve to help the valve to move smoothly.
 - All responsibilities for the use of the engine, and other obligations and responsibilities based on laws, regulations, etc. are borne by the purchaser and the user, and SAITO SEISAKUSHO CO., LTD. is exempt from any responsibilities.
- Warranty:**
- If there is any deficiency from the factory concerning manufacture, please consult the shop or distributor you purchased from, so that our company will repair them with responsibility. Any failure or trouble caused by unnecessary disassembly, modification, or other uses than those provided in the instruction manual is not subject to the warranty.

All specifications and models are subject to change without notice.

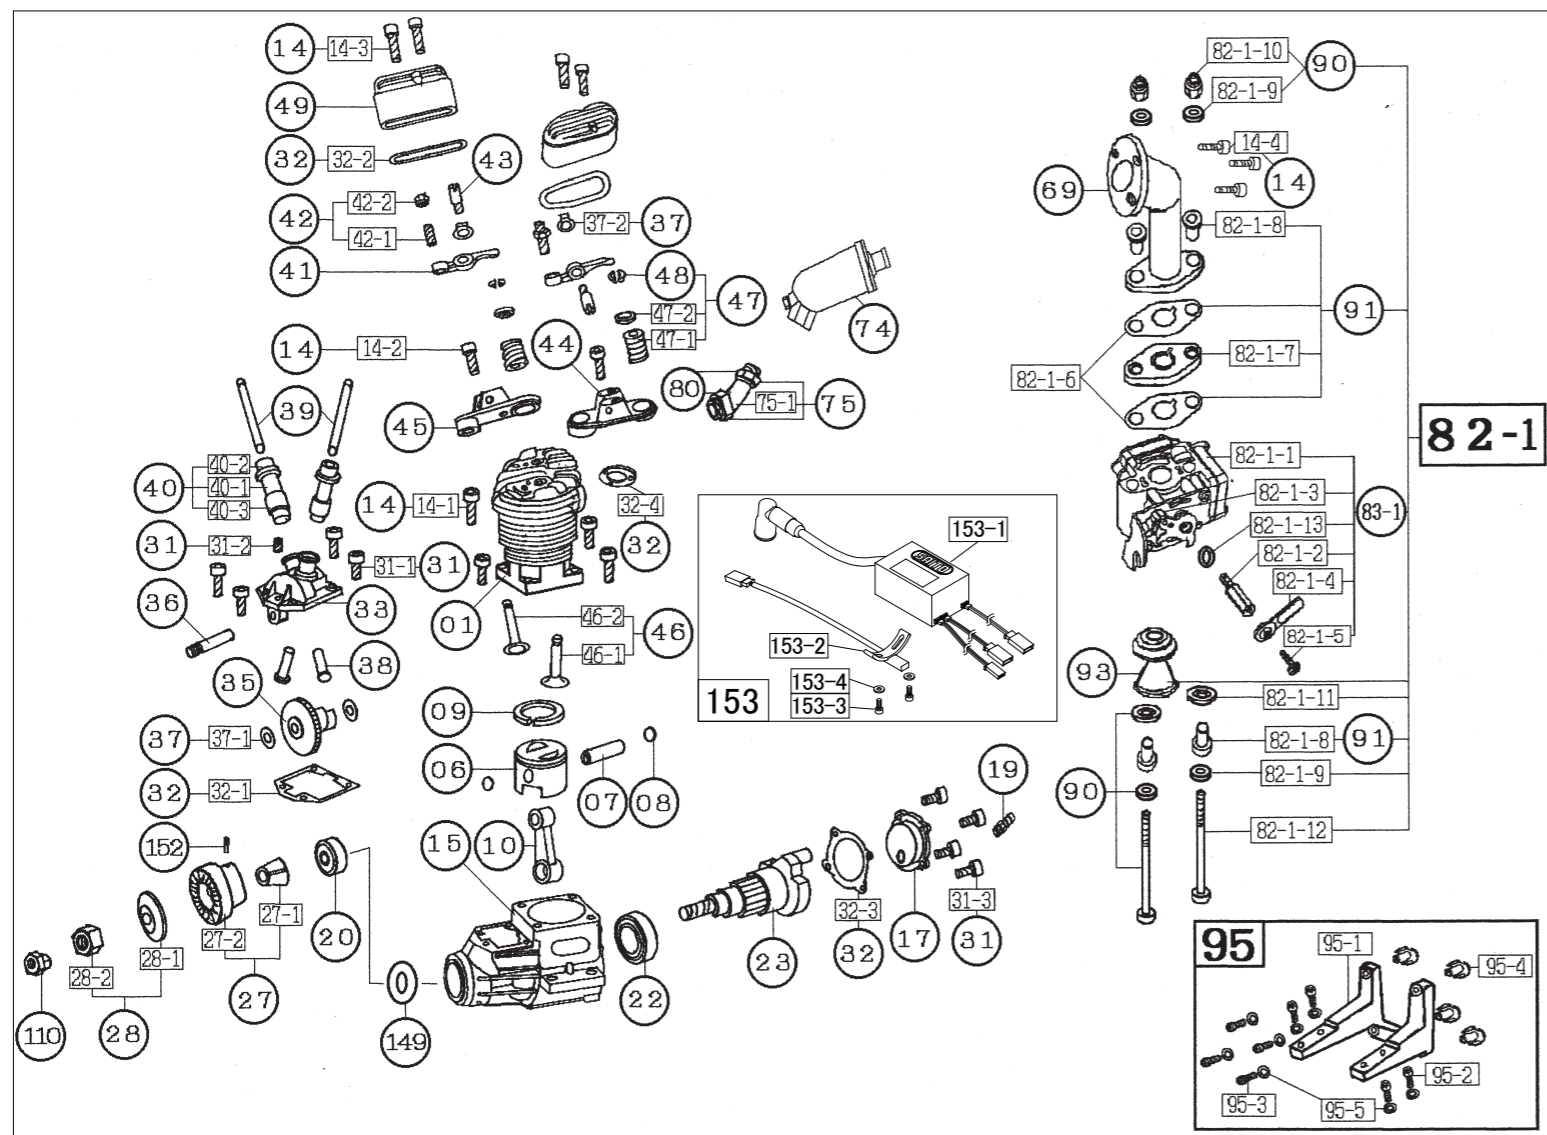

Outside dimensions

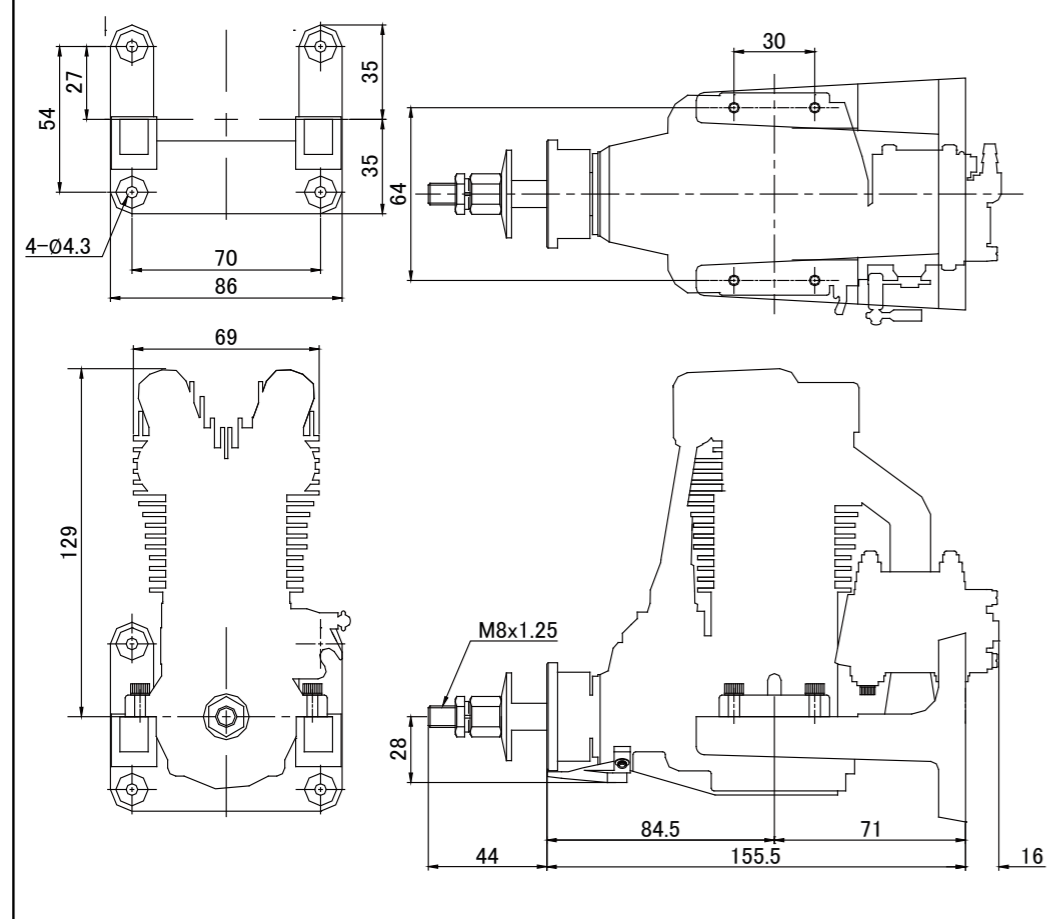

FG-40 Parts List

No.	Item	Qty	No.	Item	Qty
01	Cylinder	1	42	Rocker arm screw & Nut	2ea.
06	Piston	1	43	Rocker arm pin	2
07	Piston pin	1	44	Rocker arm bracket (left)	1
08	Piston pin retainer	2	45	Rocker arm bracket (right)	1
09	Piston ring	1	46	Valve set (In & Ex)	1set
10	Connecting rod	1	47	Valve spring & Keeper & Retainer	2ea.
14	Cylinder screw set	1set	48	Valve retainer	2
15	Crankcase	1	49	Rocker arm cover	2
17	Rear cover (Back plate)	1	69	Intake manifold (Intake pipe)	1
19	Breather nipple	1	74	Muffler	1
20	Front ball bearing	1	75	Muffler manifold set	1set
22	Rear ball bearing	1	80	Muffler nut	2
23	Crankshaft	1	82-1	Carburetor complete	1set
27	Taper collet & Drive flange	1ea.	83-1	Carburetor body assembly	1set
28	Prop washer & Nut	1ea.	90	Carburetor screw & spring set	1set
31	Crankcase screw set	1set	91	Carburetor gasket set	1set
32	Engine gasket set	1set	93	Intake velocity stack (air funnel)	1
33	Cam gear housing	1	95	Engine mount set	1set
35	Cam gear	1	110	Anti loosening nut	1
36	Cam gear shaft	1	149	Oil slinger	1
37	Steel washer set	1set	152	Screw-pin (For drive flange setting)	1
38	Tappet	1	153	Electronic ignition system	1set
39	Pushrod	1			
40	Pushrod cover & Rubber seal	2ea.			
41	Rocker arm	1			